



Resiflex 125 Ø

REFERENCE	125 TPO2
DESCRIPTION	Swivel / fixed support with blue Resiflex wheel
FIXED / SWIVEL SUPPORT	Fixed stamped steel sheet 2 mm thick Swivel pressed steel sheet 2.5 mm thick Double axial crown ball and central steel bolt Anchoring measurement: 80X60mm between centers to M-8 Finish: Silver electro-zinc
RING	Ring diameter 125X40 Polyamide 6 core super-elastic polyurethane elastic band Sealed ball wheelset bearing. 2RS quality Nylon anti-threading platens for solid and liquid protection

HARDNESS	85 Shore A
-----------------	------------



CERTIFICATION



SWIVEL

FIX

COMPONENTS

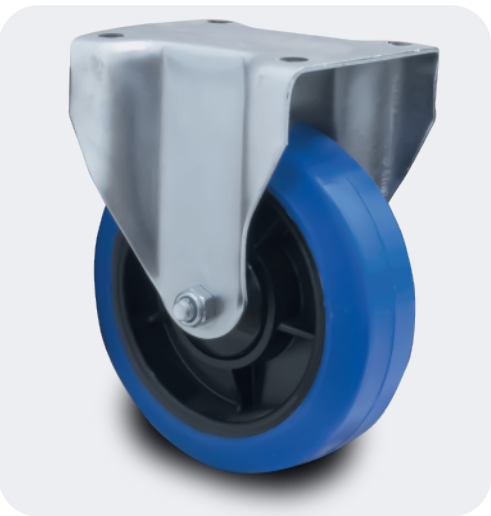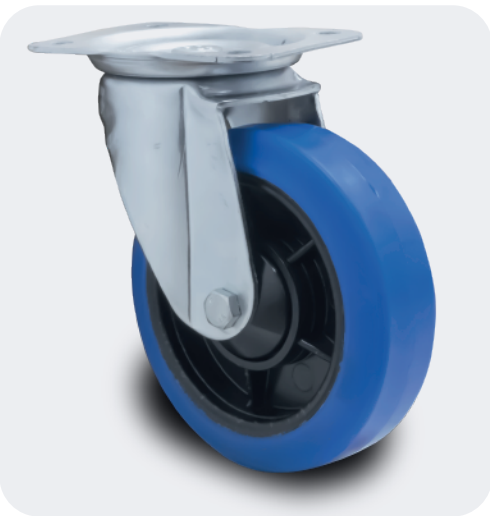

With new generation wheels we get **40% reduction in effort** to start the movement of a roll container

Dynamic Load **200Kg**

If we can be of any further assistance, please let us know. We have an excellent team to advise you.

Email: marketing@sumal.es
Tel: +34 935 861 400
Web: www.sumal.es